



## Liquid Receiver

V series receiver are usually installed on high pressure liquid line of refrigeration systems to store excessive refrigerant when the load of the system changes.

### FEATURES


- THE INLET IS USE SOLDER CONNECTION AND OUTLET USES THREAD CONNECTION
- INTERNAL FLOW-OUT IS REALIZED BY SUCTION TUBE



### GENERAL SPECIFICATIONS

- Applicable refrigerant: R22, R134a, R407C and R410A etc.
- Applicable medium temperature: -30°C~+120°C (-22°F~+240°F)
- Applicable ambient temperature: -35°C~ +60°C (-22°F~+131°F)
- Maximum working pressure: 3.5MPa
- Certification: UL, PED

### TECHNICAL PARAMETERS

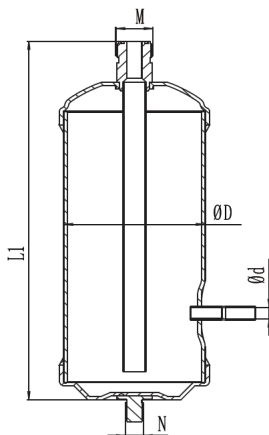

Model	M in	d		L	D		L		N
		in	mm		in	mm	in	mm	
LRA-V00076-017	3/4-16UNF-2A	0,256	6,5	0,75	3	76,2	8,27	210	screw 3/8-16UNC-2A
LRA-V00076-018	3/4-16UNF-2A	0,256	6,5	0,6	3	76,2	6,73	171	screw 3/8-16UNC-2A
LRA-V00127-016	3/4-16UNF-2A	0,256	6,5	2,1	5	127	009	221	screw 3/8-16UNC-2A
LRA-V00127-017	3/4-16UNF-2A	0,381	9,67	3,5	5	127	12,95	329	screw 3/8-16UNC-2A
LRA-V00153-004	3/4-16UNF-2A	0,381	9,67	5	6	152,4	12,95	329	screw 3/8-16UNC-2A
LRA-V00153-011	1-14UNS-2A	0,381	9,67	6	6	152,4	15,95	405	screw 3/8-16UNC-2A
LRA-V00153-012	1-14UNS-2A	0,506	12,85	8	6	152,4	19,96	507	screw 3/8-16UNC-2A

